





Brake Drum Geared Coupling

Coupling Size	Torque	Max RPM	Finish Bore		Ø A	Ø B	C	Ø D	E	L	L1	L2	Weight (KG.)
			Min	Max									
SBDGC4"	980	8000	15	40	101.6	80	70	65	15	102.5	43	57	5.0
SBDGC5.5"	1600	6300	15	45	139.7	85	85	70	20	125	55	67	12.6
SBDGC6"	2450	6300	15	45	152.5	90	85	70	20	125	55	67	14.0
SBDGC6.3"	2450	6300	15	45	160.0	90	85	70	20	125	55	67	16.0
SBDGC7"	4400	5000	20	55	177.8	120	95	85	20	140	60	75	20.0
SBDGC8"	8350	4000	20	75	203.2	120	95	120	20	145	58	82	26.8
SBDGC10"	19620	3350	25	90	254.0	150	115	140	20	170	73	92	50.0
SBDGC12"	31500	2850	25	110	304.8	225	125	175	30	204	75	124	68.0

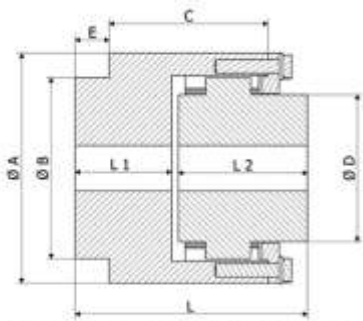

BRAKE DRUM GEARED COUPLING



BRAKE DRUM WITH GEAR COUPLING

Brake Drum With Gear Coupling

Size	Finish Bore			Torque (NM)	Max. RPM	Ø A	Ø B1	Ø B2	C1	C2	Ø E	Ø F	G	H	I	L	Weight (KG)
	Min	D1 Max	D2 Max														
SBDC 150	15	40	32	500	7900	150	65	50	64	45	75	120	1	80	95	110	7.600
SBDC 160	15	45	32	500	7900	160	70	50	74	45	75	120	1	90	110	120	9.000
SBDC 178	15	45	32	700	8100	178	70	50	74	45	75	120	1	90	110	120	10.500
SBDC 200	20	55	40	1000	6400	200	90	65	77	55	110	170	2	100	120	134	15.500
SBDC 250	20	65	40	1000	6400	250	105	65	77	55	110	170	2	120	130	134	24.500
SBDC 250A	20	65	55	2710	5000	250	105	85	77	70	125	185	2	120	130	149	27.000
SBDC 300	30	85	68	4900	4000	300	130	105	105	85	150	220	2	150	170	192	50.000
SBDC 300A	40	85	85	9200	3350	300	130	130	105	105	175	250	2	150	170	212	57.000
SBDC 375	40	85	85	9200	3350	375	135	130	110	105	175	250	3	165	185	218	84.000
SBDC 400	40	95	85	9200	3350	400	150	130	118	105	175	250	3	180	210	226	91.000
SBDC 400A	40	95	100	14300	2800	400	150	155	116	110	200	290	4	180	210	230	100.000
SBDC 450	40	110	100	14300	2800	450	170	155	120	110	200	290	5	200	220	235	123.000
SBDC 450A	40	110	110	21950	2500	450	170	175	120	125	230	320	5	200	220	250	132.000
SBDC 500	50	135	110	21950	2500	500	210	175	145	125	230	320	5	225	250	275	189.000



+91 98794 30132

+91 96621 60816